

# 1 Sprinklers, Nozzles & Accessories

## Standard/Extended Coverage Sprinklers



- Wide range of bulb and fusible link sprinklers
- K Factor: 40, 57, 80, 115, (160, 200 extended coverage only)
- Standard response, special response and quick response

- Connection: 3/8" BSP, 1/2" NPT and 3/4" NPT
- Finish: brass, chrome, white
- Deflector: pendent, upright, conventional, sidewall and concealed


## Storage Sprinklers



- Early Suppression Fast Response (ESFR) sprinklers: K-200, K-240, K-363
- Extended coverage EC-25: K-363, max coverage to 4.3mx4.3m.
- Specific application control mode sprinkler (Ultra K-17): K-242, max storage height 7.6 m, max ceiling height 9.1 m.

- Very large orifice sprinkler (K17-231): K-242, 3/4" NPT, Upright and Pendent.
- Large Drop sprinkler (LD): K-161, 3/4" NPT, brass
- Extra Large Orifice sprinklers (ELO): bulb and fusible link type, K-161, 1/2" NPT and 3/4" NPT, upright and pendent.


## Residential Sprinklers & Dry Sprinklers

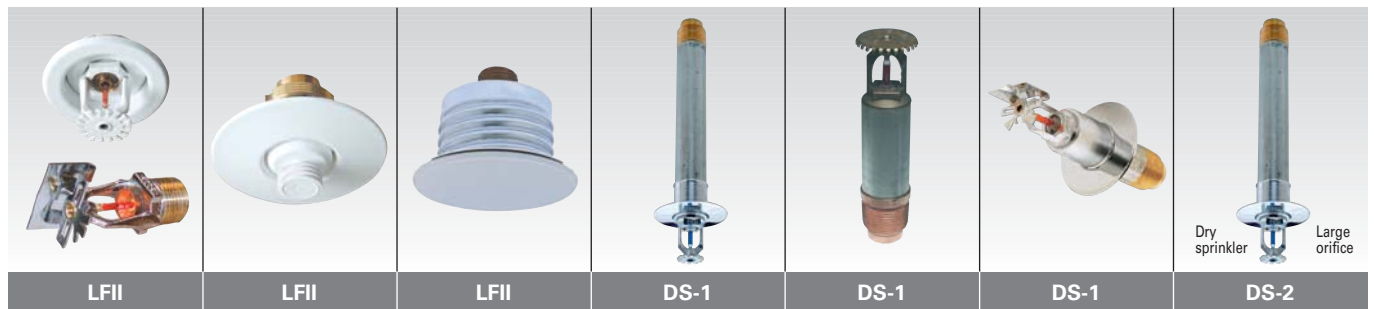

- Residential sprinklers (LFII) ; pendent, horizontal sidewall, flush and concealed
- LFII Range; K-61, K-71, 1/2" NPT, brass, chrome and white
- Residential sprinkler design guide available on request

- Dry sprinklers (DS-1/DS-2): pendent, upright and horizontal sidewall
- DS-1 range; K-80, 1" ISO, standard/quick response, standard/extended coverage
- DS-2 range; K-147 till K-161, 1" ISO, standard/quick response


## Special Sprinklers & Multiple Jet Controls

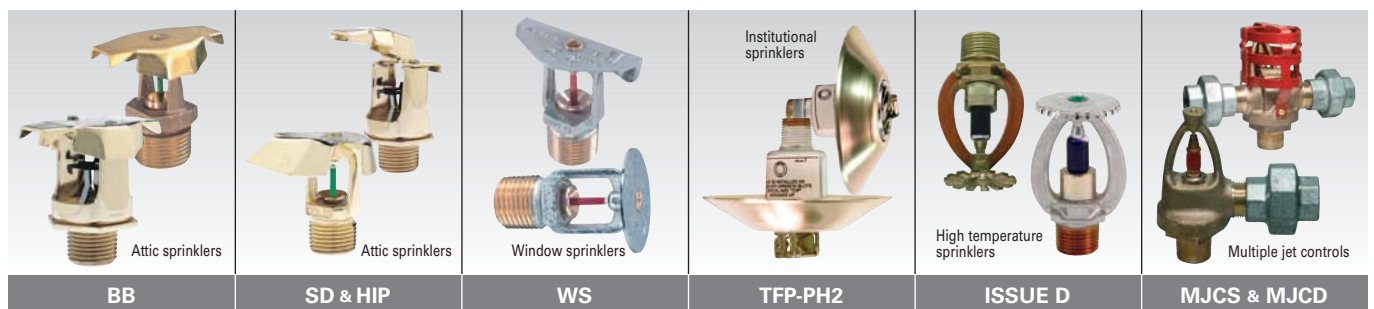

- Attic sprinklers, K-80, K-115, quick response
- Window sprinklers; K-80, upright and horizontal
- Combustible concealed sprinkler (CC1); K-43, upright

- High pressure sprinklers (20 bar) and institutional sprinklers
- Flat spray sprinklers and high temperature sprinklers
- Multiple jet controls (thermal control valves)

## Nozzles

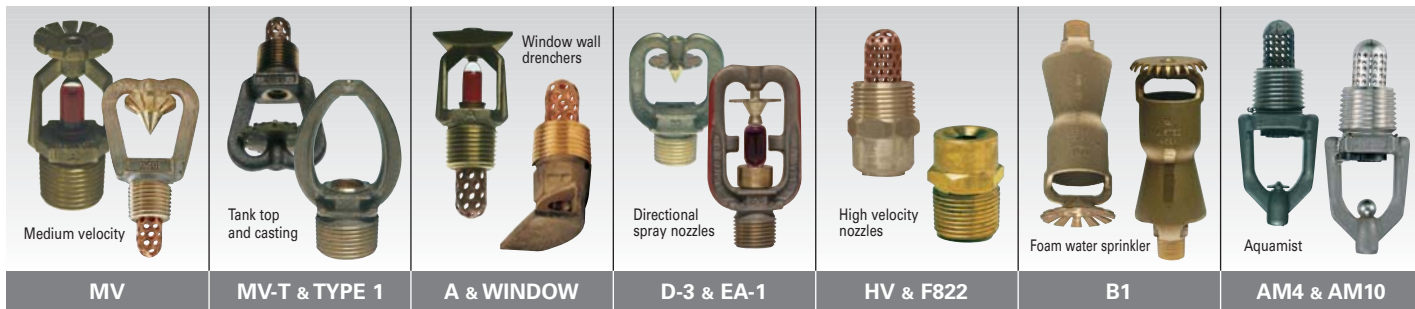

- Medium velocity and directional spray nozzles; K-16 till K-100.
- High velocity nozzles; K-23 till K86
- (Window) Drenchers for water curtains

- Mulsifyre and protectospray nozzles
- Foam water sprinklers; K-20,40 and K80
- Aquamist sprinklers and nozzles; K-3.5,4.7 and K-9.2

## Sprinkler Accessories



- Recessed escutcheons; adjustable 12.7 mm or 19.1 mm
- Flat escutcheons
- Sprinkler cabinets; capacity for 6, 12, 24, 36 or 50 sprinklers

- Sprinkler guards; for pendent and upright sprinklers
- Watershields; diameter 89mm, 100mm or 165mm.
- Sprinkler wrenches for all sprinkler types.